


- 1 OBSTRUCTION LIGHT. EXTEND 1/2" RIGID CONDUIT WITH WIRING UP THROUGH ROOF TO OBSTRUCTION LIGHT. MOUNTING DETAILS ON THE HELIPAD DESIGN DRAWINGS, SHEETS E-1 & E-2.
- 2 WIND CONE. EXTEND 3/4" RIGID CONDUIT WITH WIRING UP THROUGH ROOF. REFER TO WIND CONE MOUNTING DETAILS ON THE HELIPAD DESIGN DRAWINGS, SHEETS E-1 & E-2.
- 3 RADIO OPERATED LIGHTING CONTROLLER. REFER TO ROLC WIRING DIAGRAM FOR ALL RACEWAY & SWITCHES REQUIRED FOR THIS SYSTEM. SEE HELIPAD DESIGN DRAWINGS, SHEETS E-1 & E-2.
- 4 ROTATING BEACON. EXTEND RACEWAY & WIRING UP TO ROTATING BEACON. SEE HELIPAD DESIGN DRAWINGS, SHEETS E-1 & E-2.
- 5 ANTENNA. EXTEND 3/4" RIGID CONDUIT UP THROUGH ROOF AND SECURE AS REQUIRED. REFER TO ROLC ANTENNA MOUNTING DETAIL ON HELIPAD DESIGN DRAWINGS, SHEETS E-1 & E-2.
- 6 J-BOX FOR LIGHTING SHALL BE WALL MOUNTED BELOW PLAYHOUSE WINDSHIELD AND INDICATED ON THE HELIPAD DESIGN DRAWINGS SHEETS E-1 & E-2.
- 7 FUEL/WATER SEPARATOR – 120V, 10 NE.
- 8 DOOR MOTOR OPERATOR – 120V, 10, NE POWER.
- 9 ELEVATOR CONTROLLER – 60HP, 480, 3Ø.
- 10 ELEVATOR POWER MODULE/RISER/ELECTRICAL CONTROL SWITCH – 200A, 480V, 3Ø. BUSSMAN CAT # P52-148-R1-K-C-A-F3.
- 11 30A-2P SAFETY SWITCH – NEMA 1, (CAR LIGHTING & FAN)
- 12 30A-2P SAFETY SWITCH – NEMA 1.
- 13 DOOR ACCESS CONTROLLER – 120V, 10, NE POWER.
- 14 SHADE RADIOMETER, OUTLET BOX, CONDUIT, WIRING AND TERMINATIONS BY E.C. RADIOMETER BY GENERAL CONTRACTOR. REFER TO DRAWINGS EP7-105, EP7-106 & EP7-107 FOR DETAILS. VERIFY EXACT MOUNTING LOCATION OF RADIOMETER WITH SYSTEM INSTALLER PRIOR TO ROUGH-IN.
- 15 CONTRACTOR TO COORDINATE HELIPAD LIGHTING PROTECTION SYSTEM GROUPING REQUIREMENTS WITH THE HELIPAD CONTRACTOR.
- 16 DOOR ACCESS CONTROLLER, 120V-10-NE POWER.

Drawing Notes

1. PROVIDE 120 VOLT POWER TO ALL YAV BOXES. BOXES SHALL BE SERVED ON 20AMP CIRCUITS AND GROUPED AS INDICATED BELOW:
TO-R01 COT NO. EQ2LB-9
2. ALL RACEWAYS PENETRATING THE ROOF SERVING LIGHTING, WIND CONE AND ANTENNA SYSTEM SHALL BE BONDED TO THE LIGHTNING PROTECTION SYSTEM

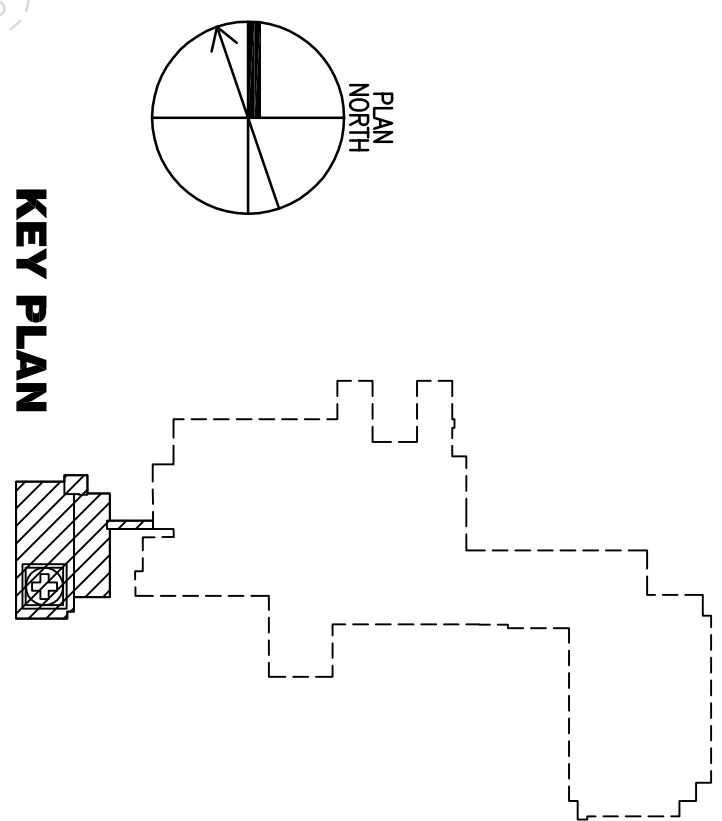

PLAN

FOR CONSTRUCTION
FULLY SPRINKLERED

[illegible]